




Extreme Pro Series - 3300mAh Data Sheet for 6743129


SPECIFICATIONS

| | | |
|----------------------------------|------------------------|-----------------------|
| Model | | 6743129 |
| Nominal Capacity | | 3300mAh |
| Nominal Voltage | | 3.7V |
| Weight | | Max 81.6g |
| AC-Impedance (mΩ) at 1kHz | | Max 2.5 |
| Dimensions | Thickness | 6.6 ± 0.3mm |
| | Width | 42.5 ± 1.0mm |
| | Length | 129.5 ± 1.0mm |
| Nominal Charge Condition | Current | 1650mA (0.5C) |
| | Voltage | 4.2V |
| | Cut-off Current | 165.0mA (C/20) |
| Nominal Discharge | Ending Time | 1.5h |
| | Current | 3300mA (1C) |
| Maximum Charge Current | Cut-off Current | 3.0V |
| | Current | 6.6A (2C) |
| Maximum Discharge Current | Continuous | 264.0A (80C) |
| | Bursts | 462.0A (140C) |
| Temperature Condition | Charge | 10~45°C |
| | Discharge | -20~60°C |
| | Storage | -20~45°C |


DIMENSIONS (mm)

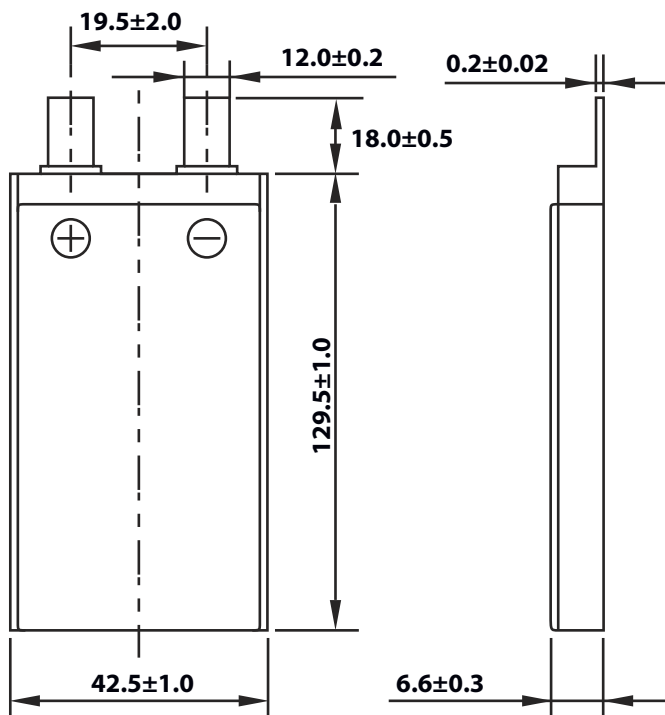


CHARGE CHARACTERISTICS

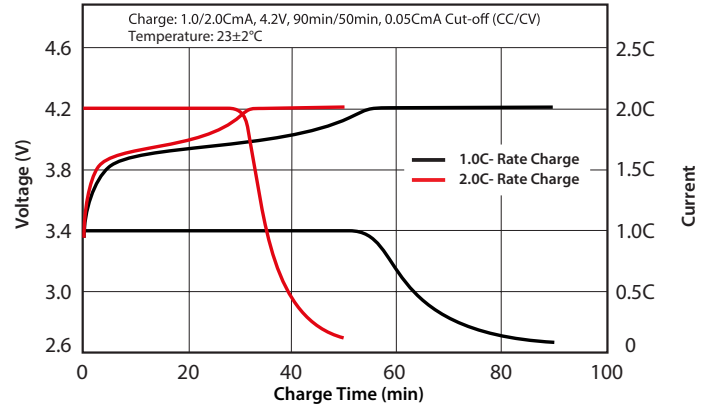

DISCHARGE RATE CHARACTERISTICS

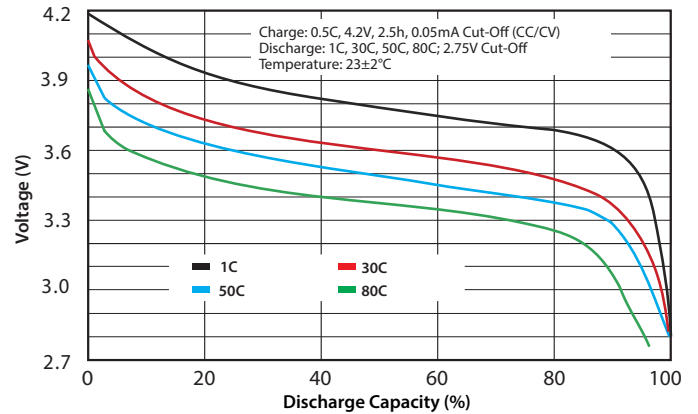

DISCHARGE TEMPERATURE CHARACTERISTICS

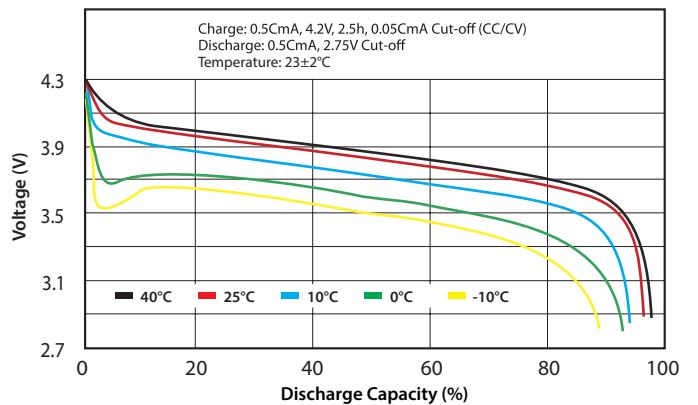

CYCLE LIFE CHARACTERISTICS

